


TOPPING™

The Settings of Foobar Player


1. You need to install a Foobar2000 player. If you already have, skip this step.
Run the installation, click "Next" to the next step.
(You can download Foobar2000 player at <http://www.foobar2000.org/download>)

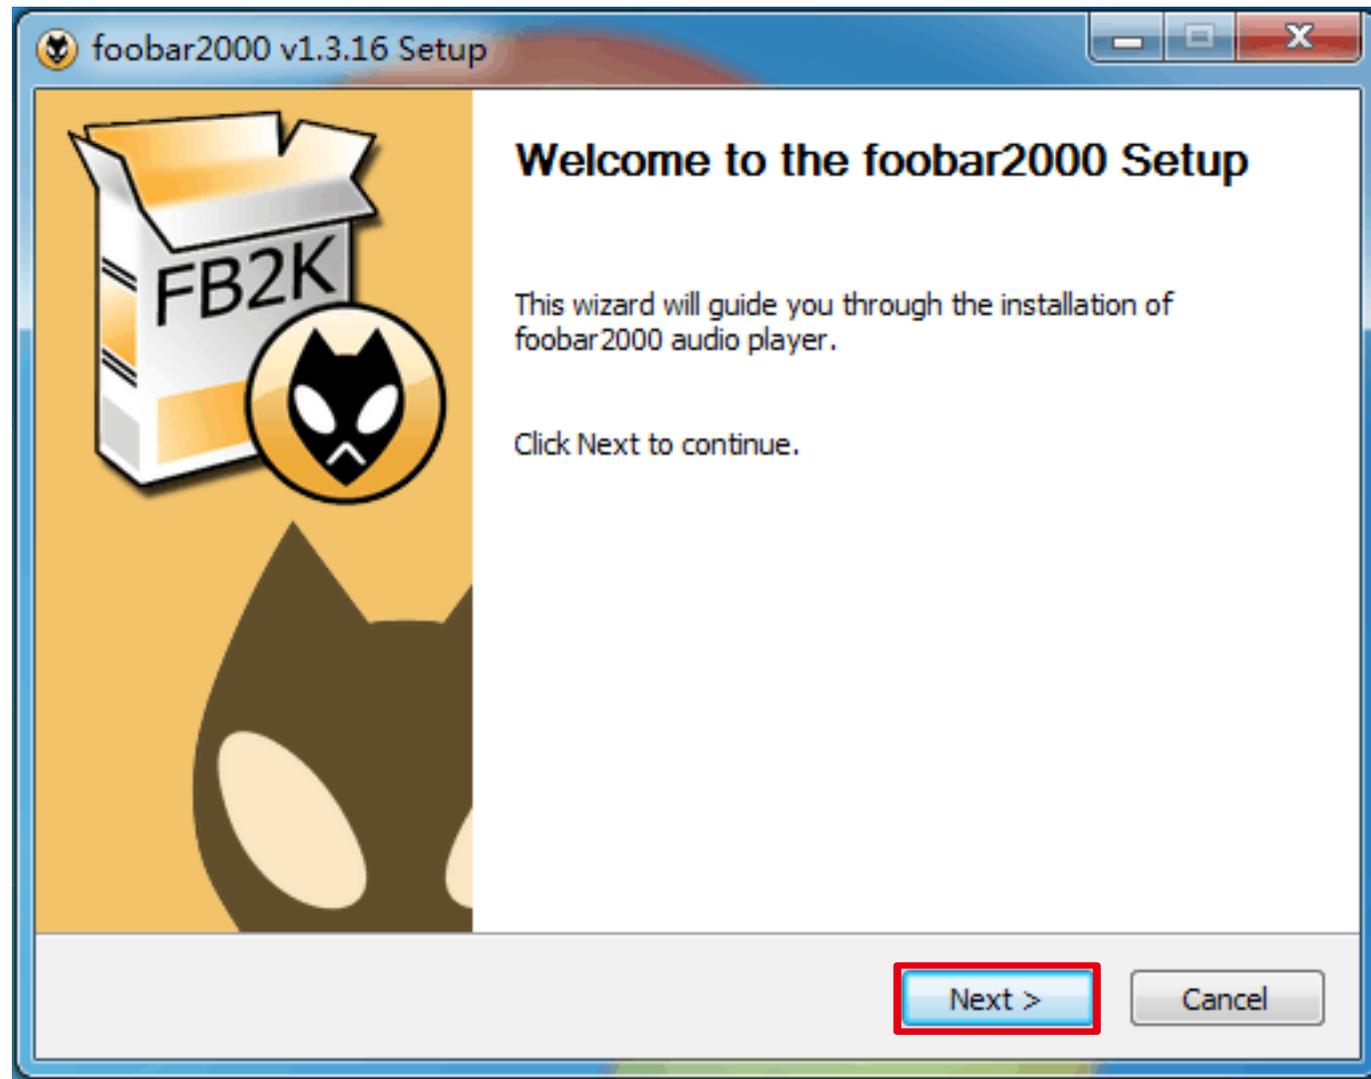


Click "I Agree".




Select the "Standard installation", click "Next".

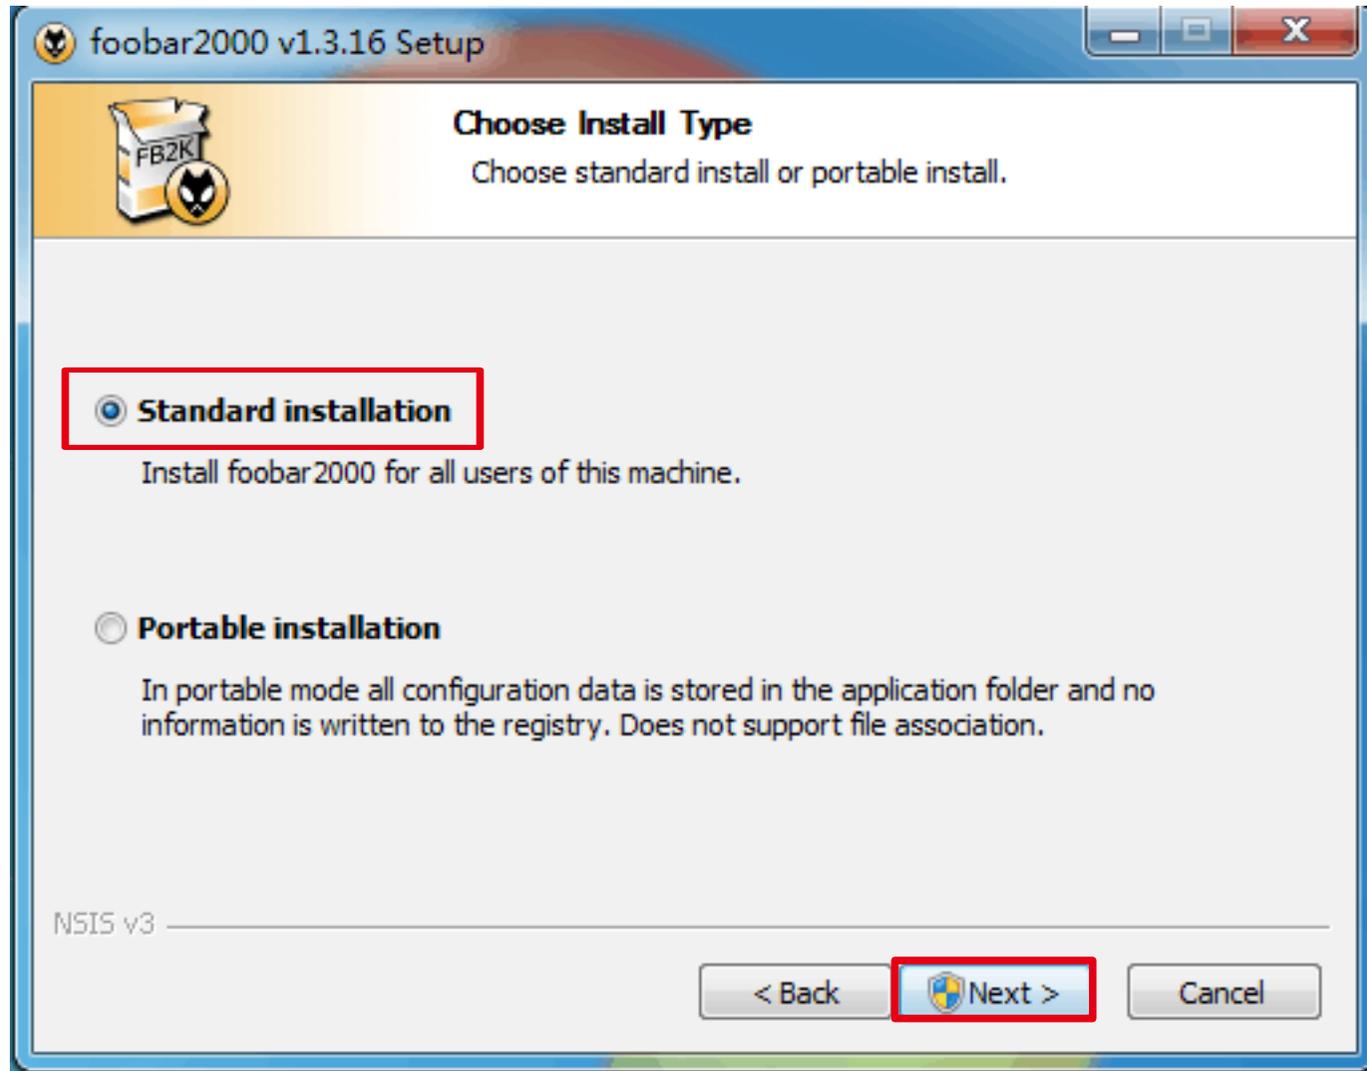


Choose install location, click "Next".

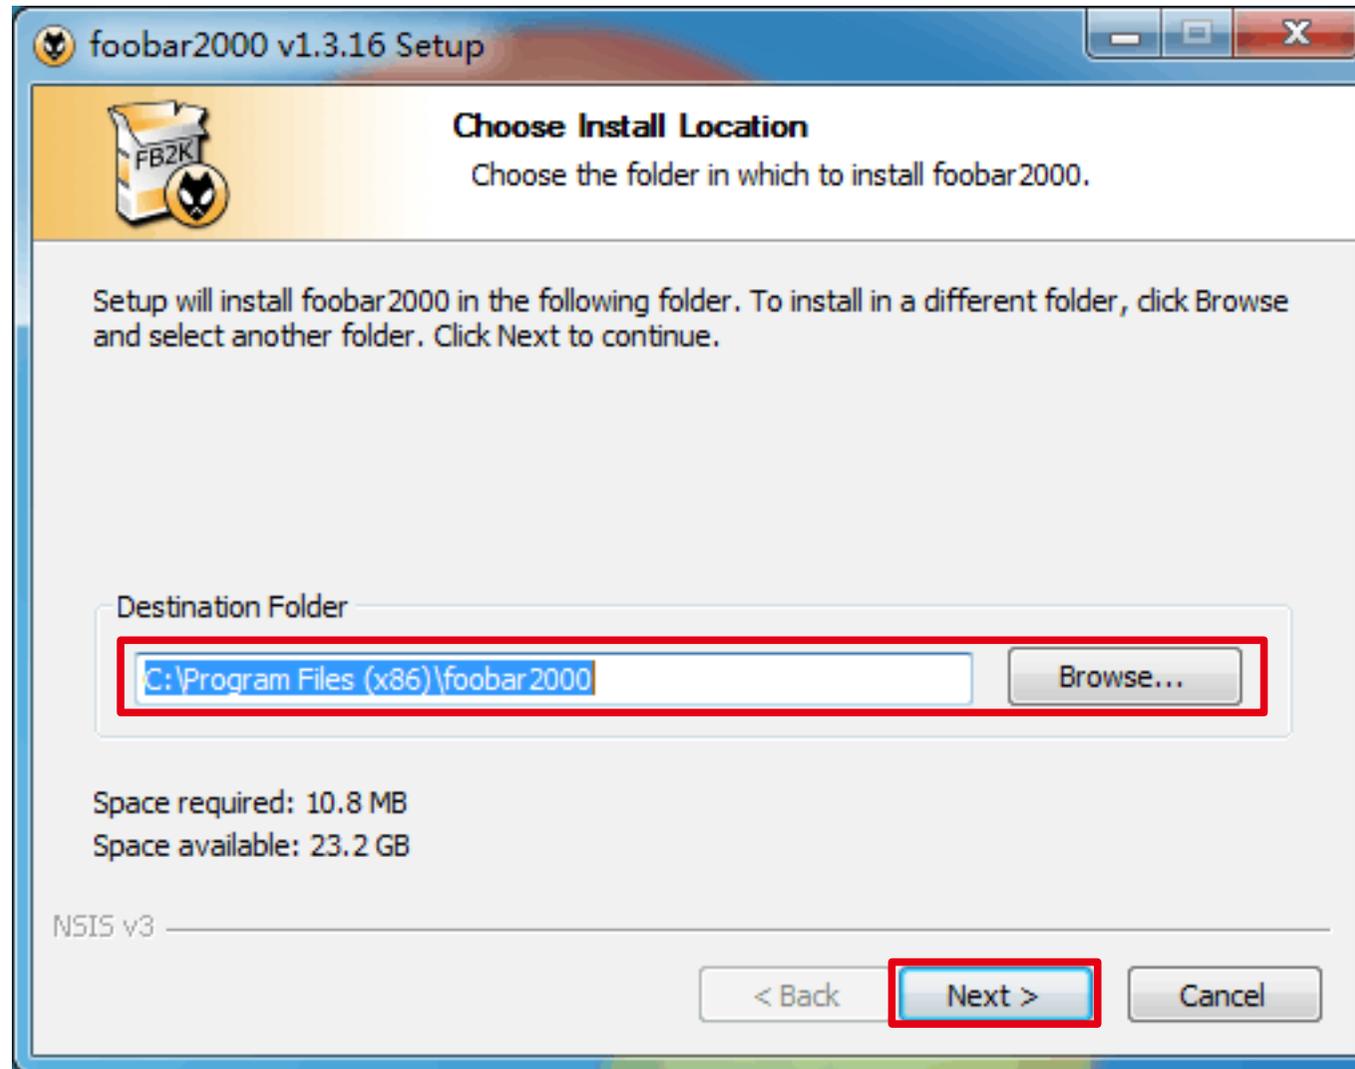

Select "Full", click "Install".

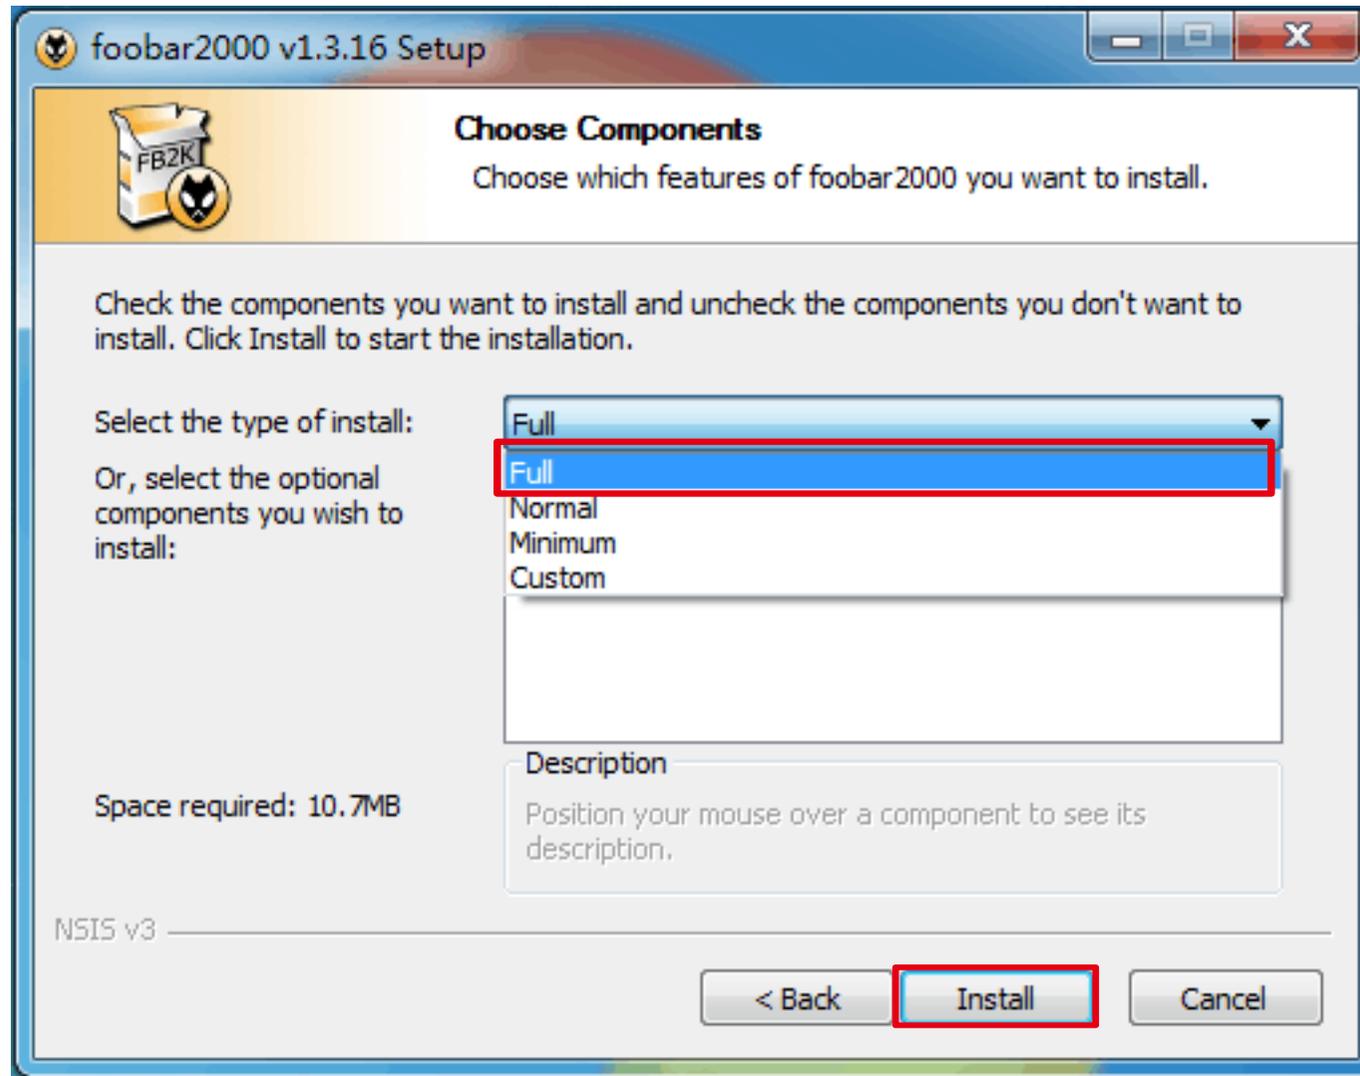


Click "Finish" to complete the installation.

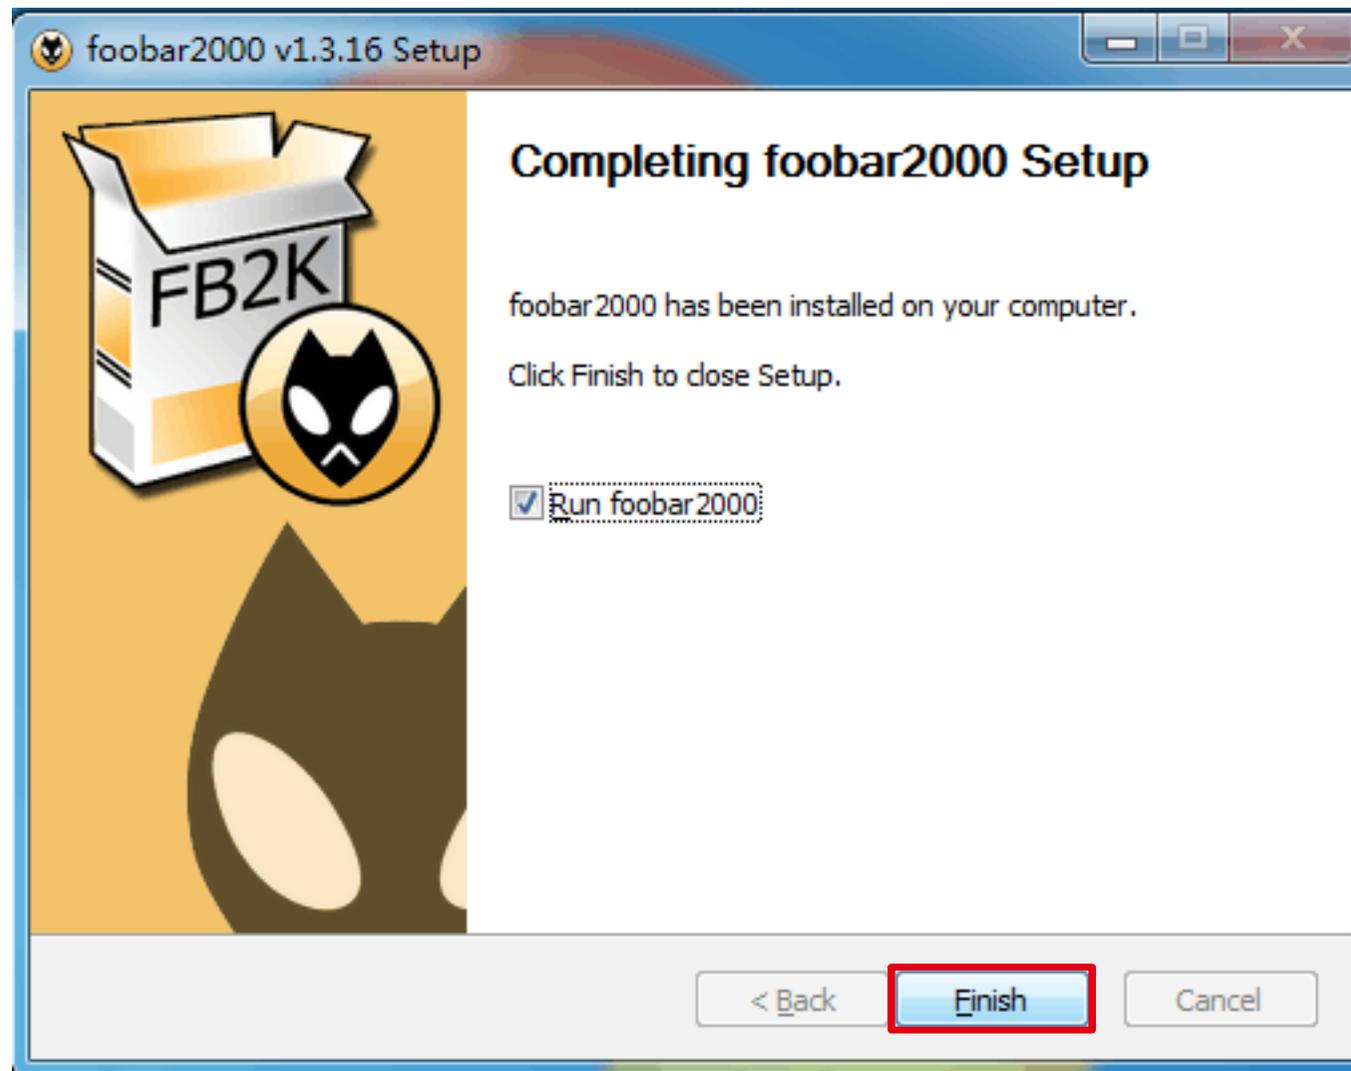


2.Foobar2000 DSD playback Settings


Run "ASIOProxyInstall-0.7.2.exe" at "FB2K DSD components" folder .

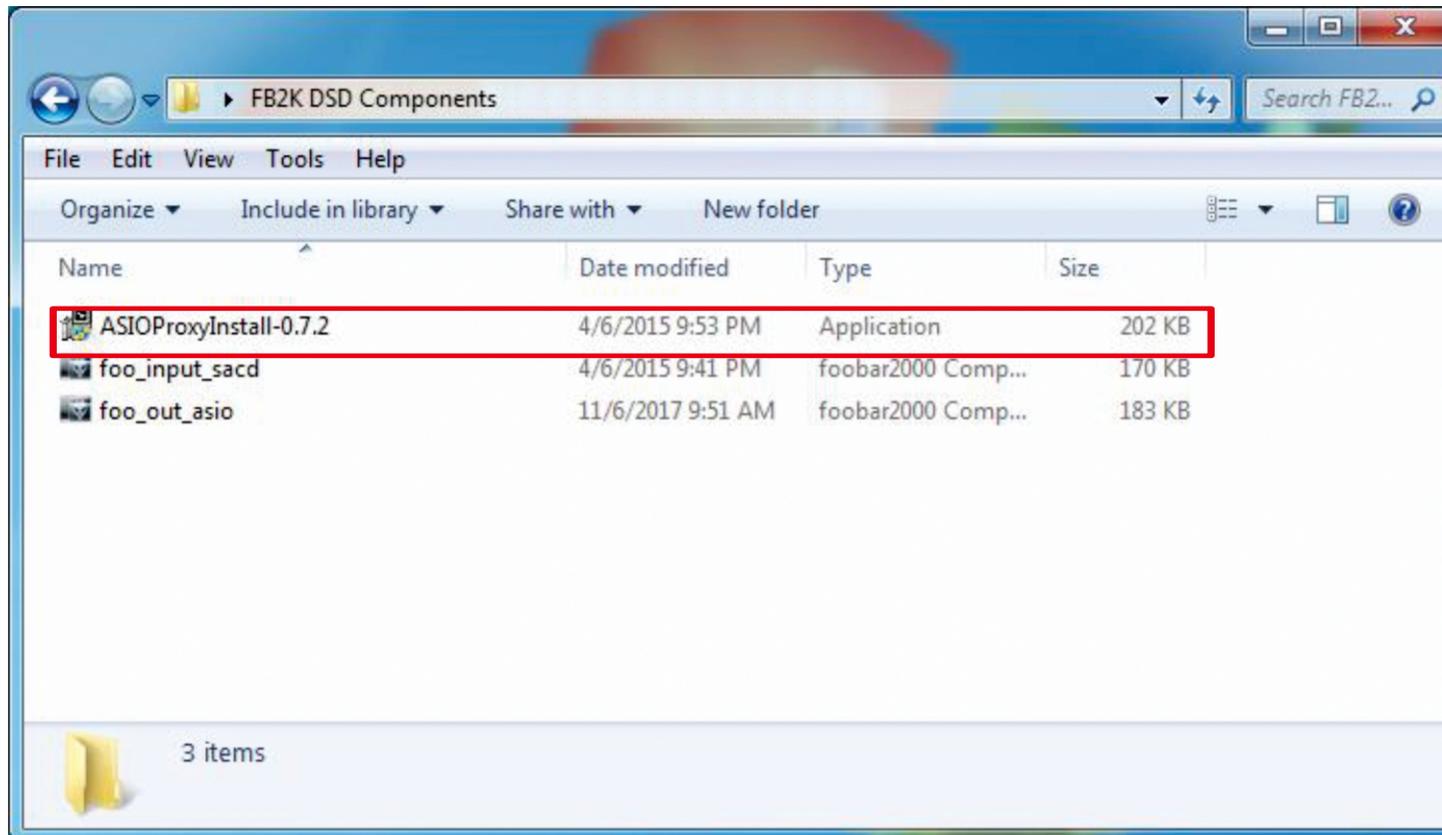


Click "Next".

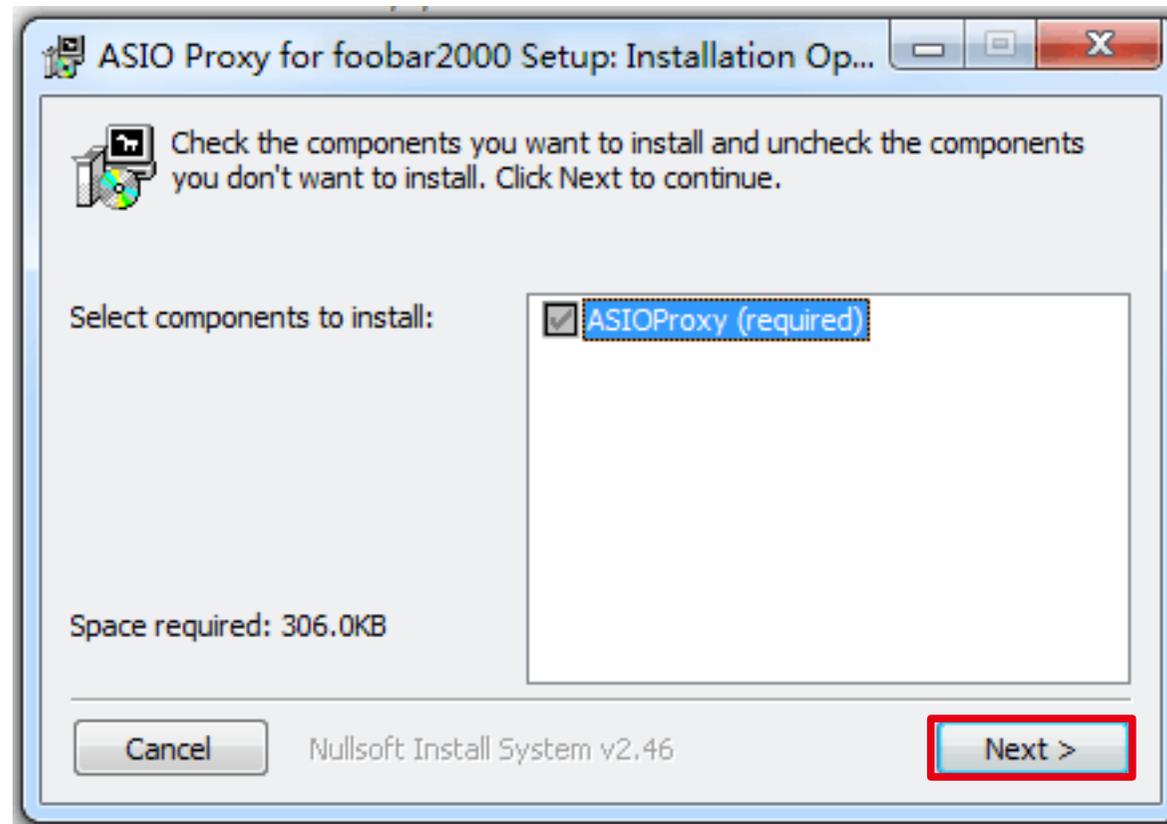


Select installation location and click "Install".

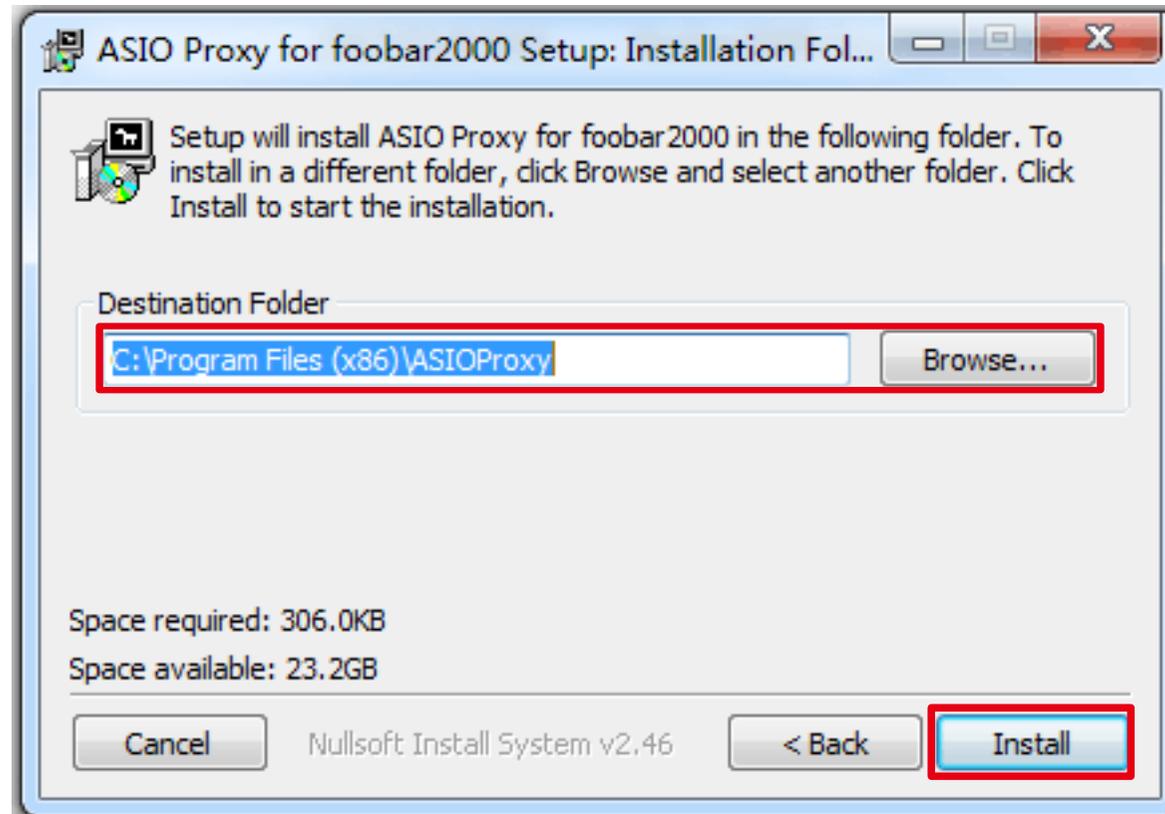


Click "Close" to complete the installation.

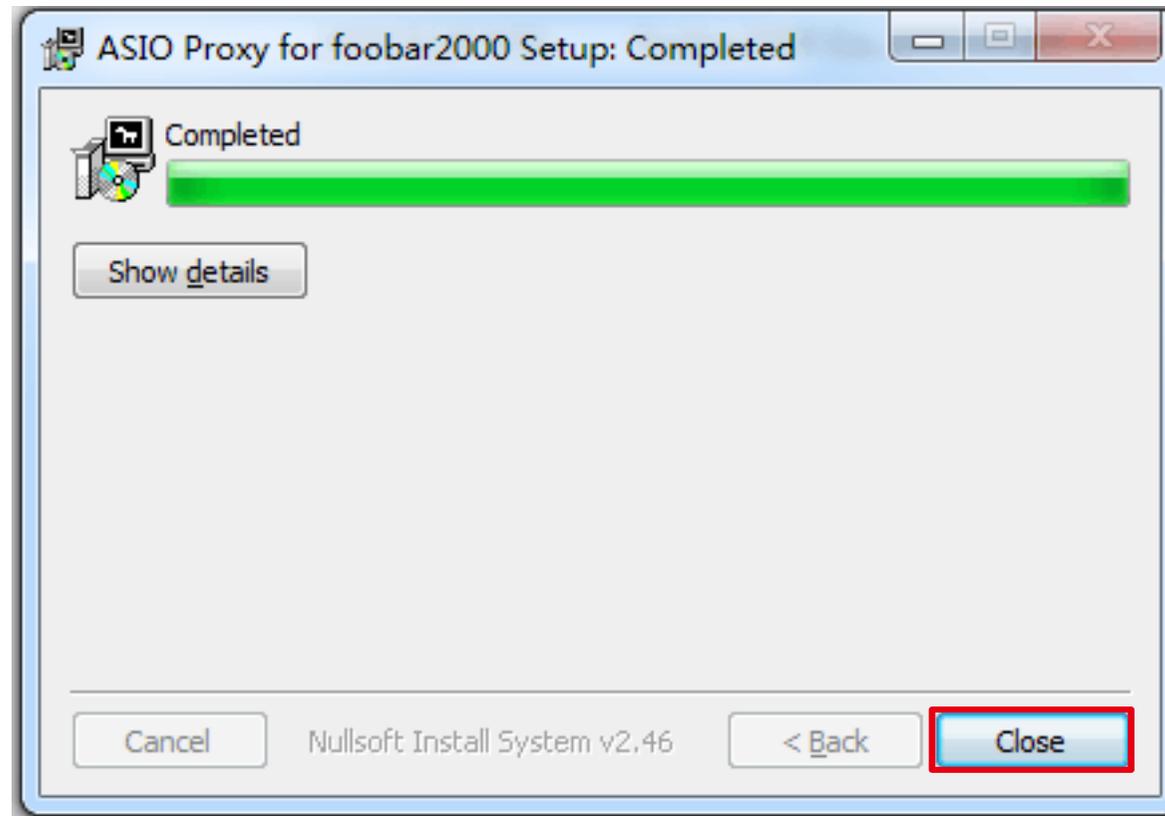


Run foobar2000 player, click "File" → "Preferences" to open this window.

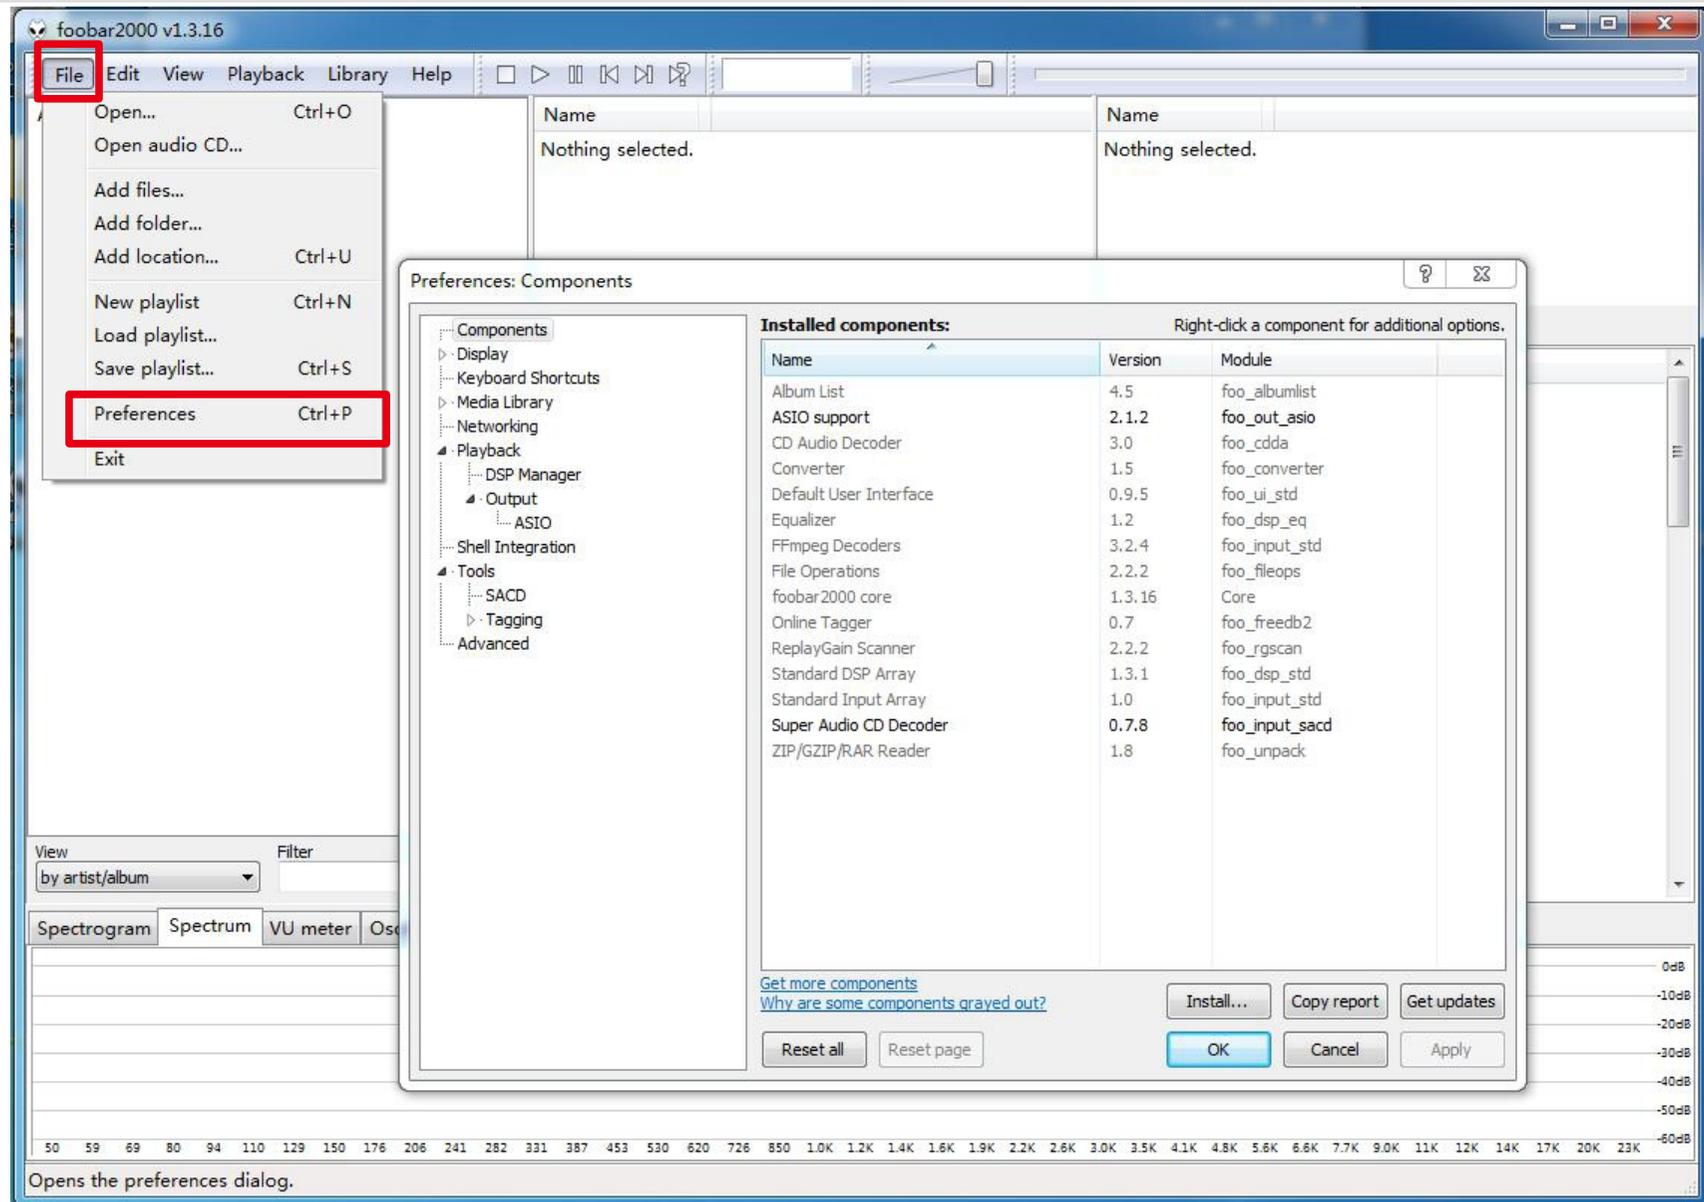


Now you need to install 2 components. Click "Install..." and find "foo_input_sacd.fb2k-component", "foo_out_asio.fb2k-component" in folder "FB2K DSD Components", click "Open".

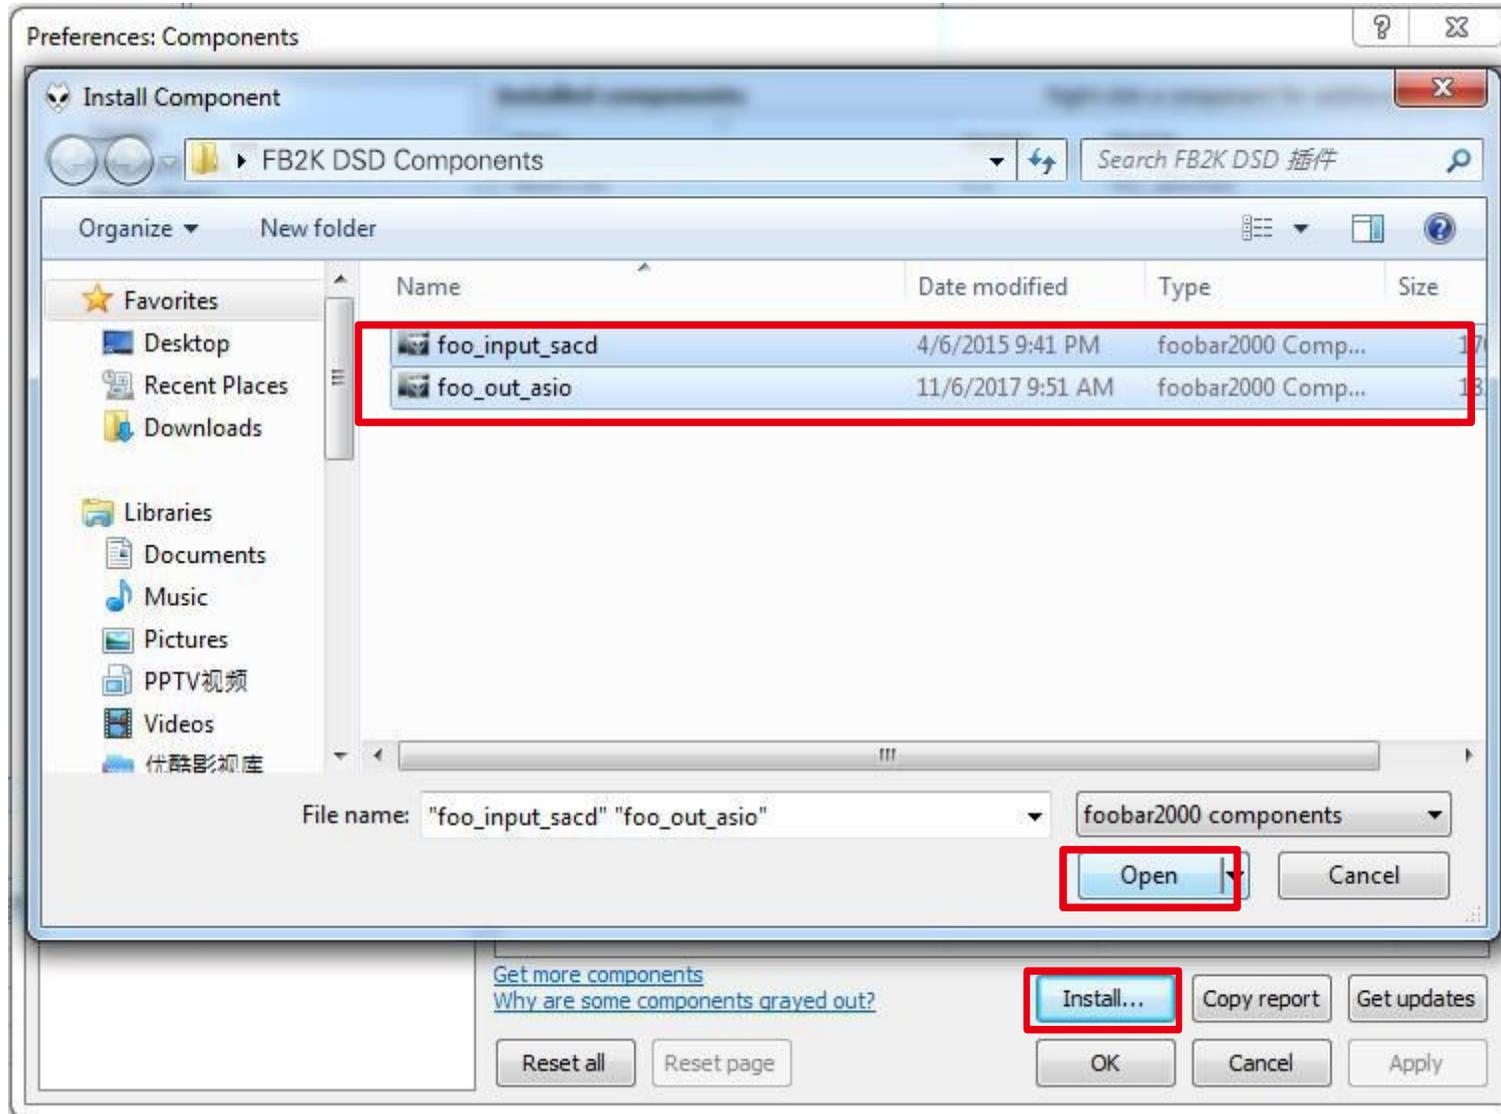


Click "OK", then Foobar2000 player will restart.

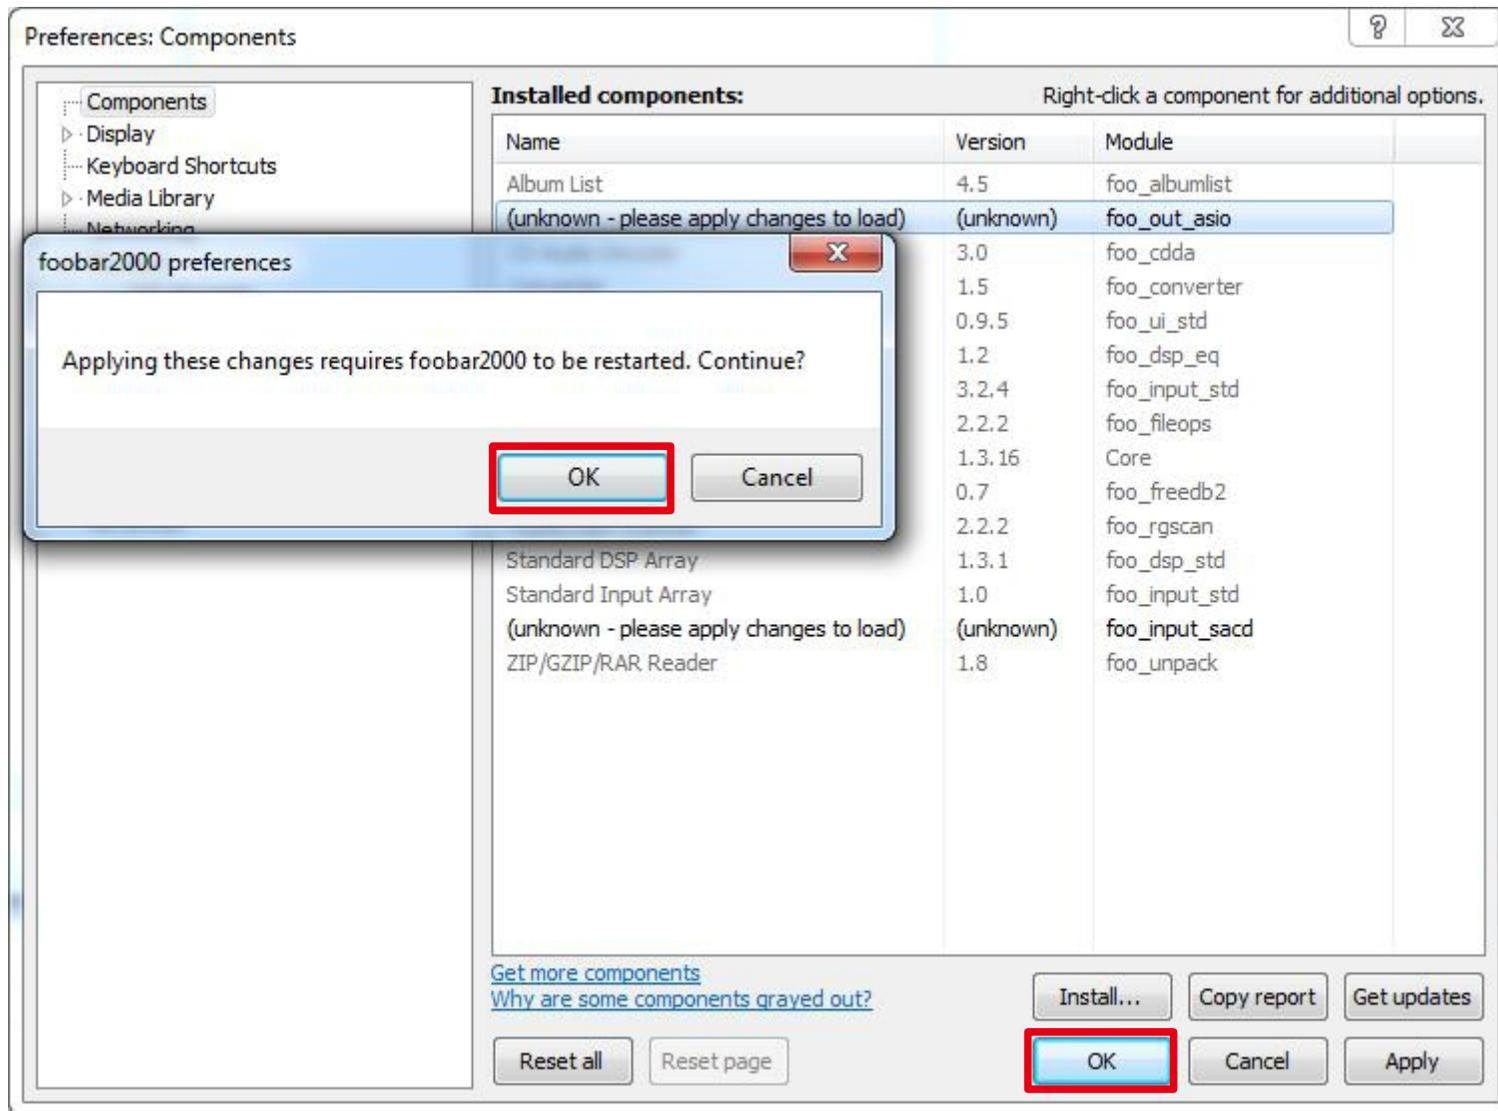


Wait for restart of Foobar2000 player and then click "File" → "Preferences" → "Playback" → "Output"; choose "ASIO: foo_dsd_asio" on "Device".

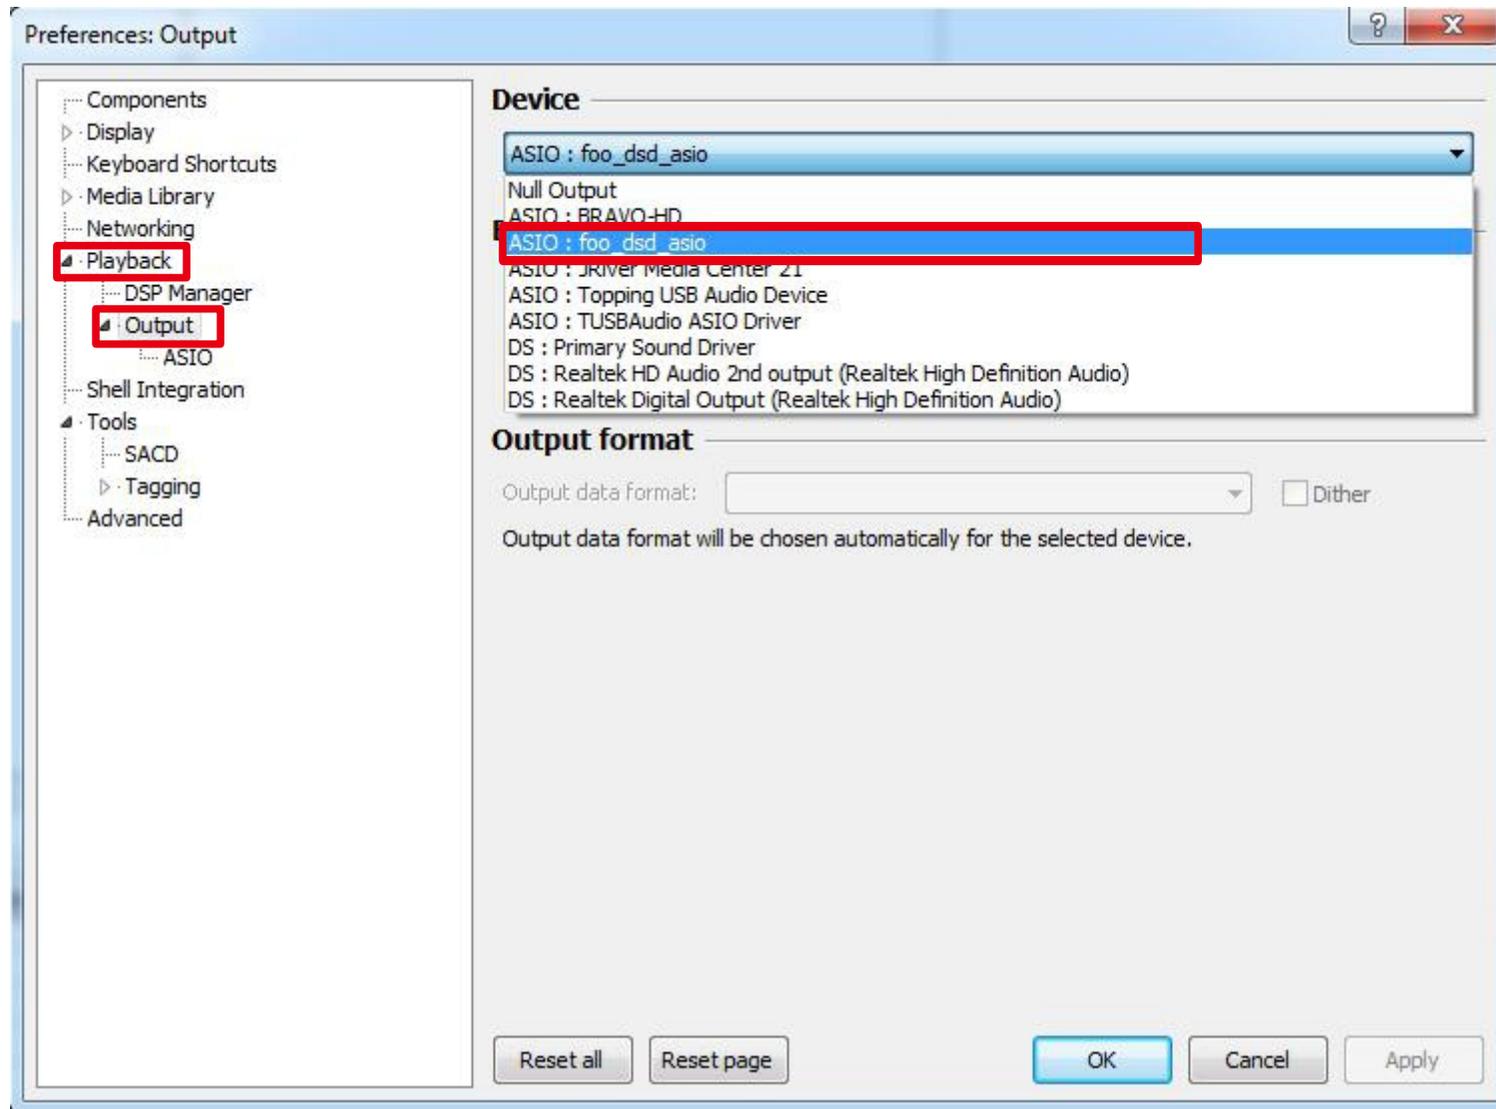

Click "ASIO", and then double-click on "foo_dsd_asio" in "ASIO drivers".

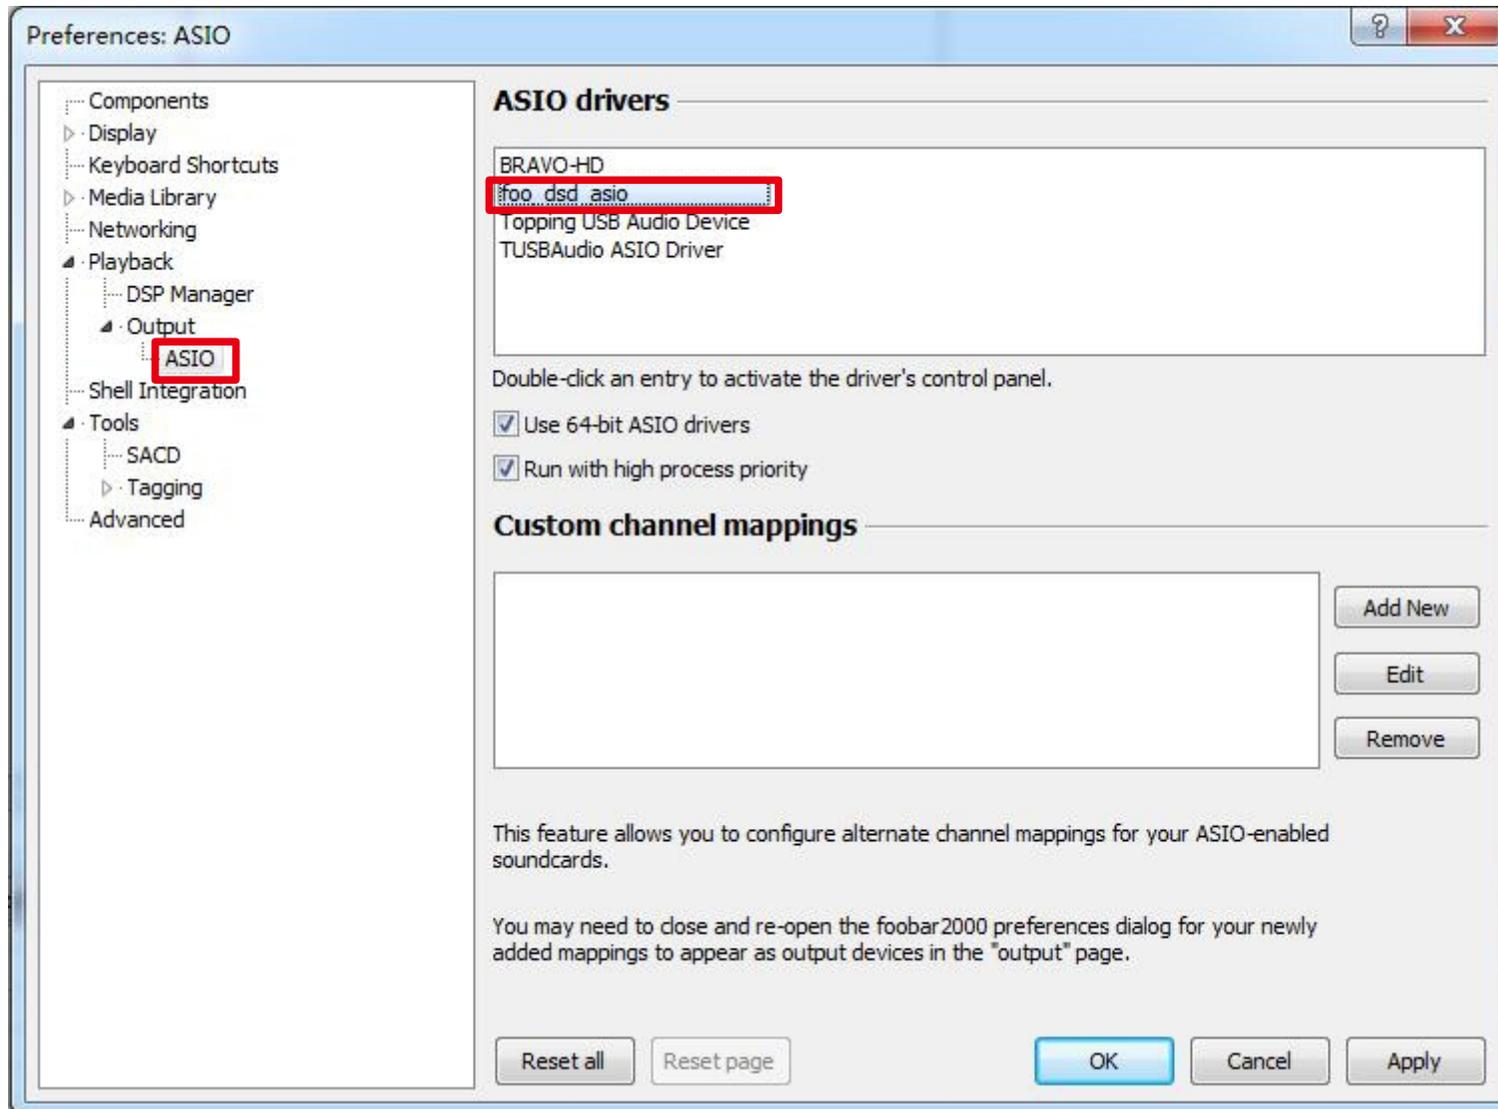


Select "Topping USB Audio Device" at ASIO driver and select your favorite DSD playback method, ASIO Native or DoP Marker 0x05/0xFA;

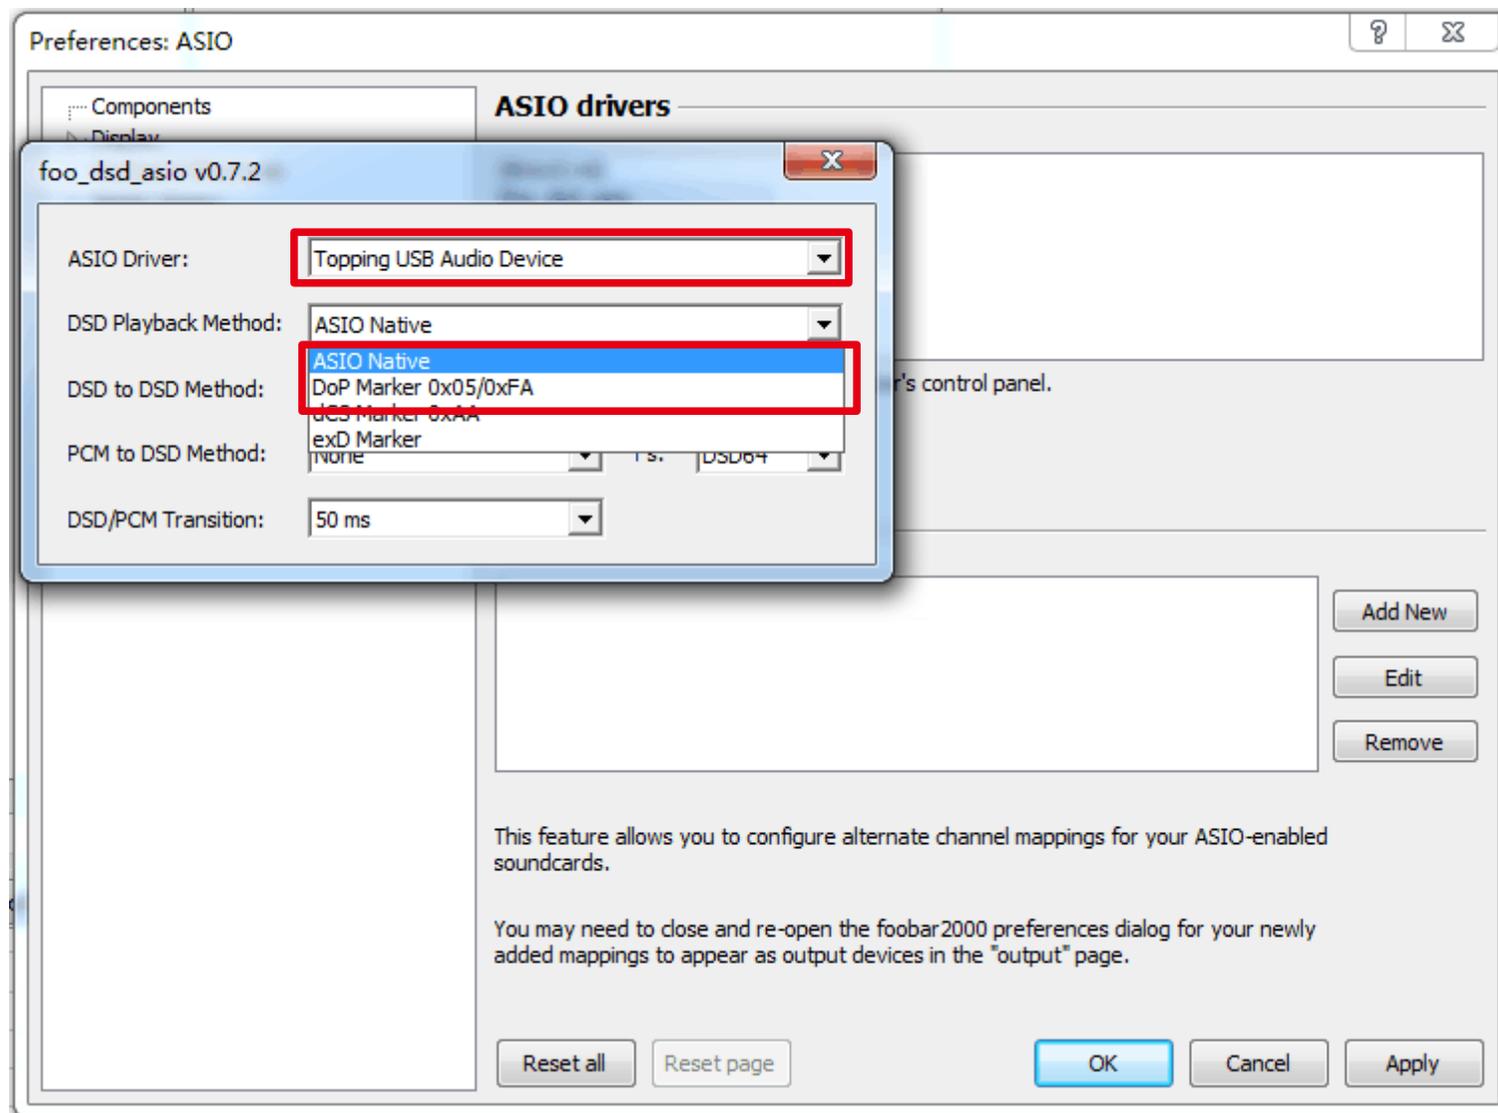

After that, click "Tools" → "SACD," choose "DSD" in "ASIO Driver Mode:", click "OK" to complete the setting of Foobar2000 player.

End.

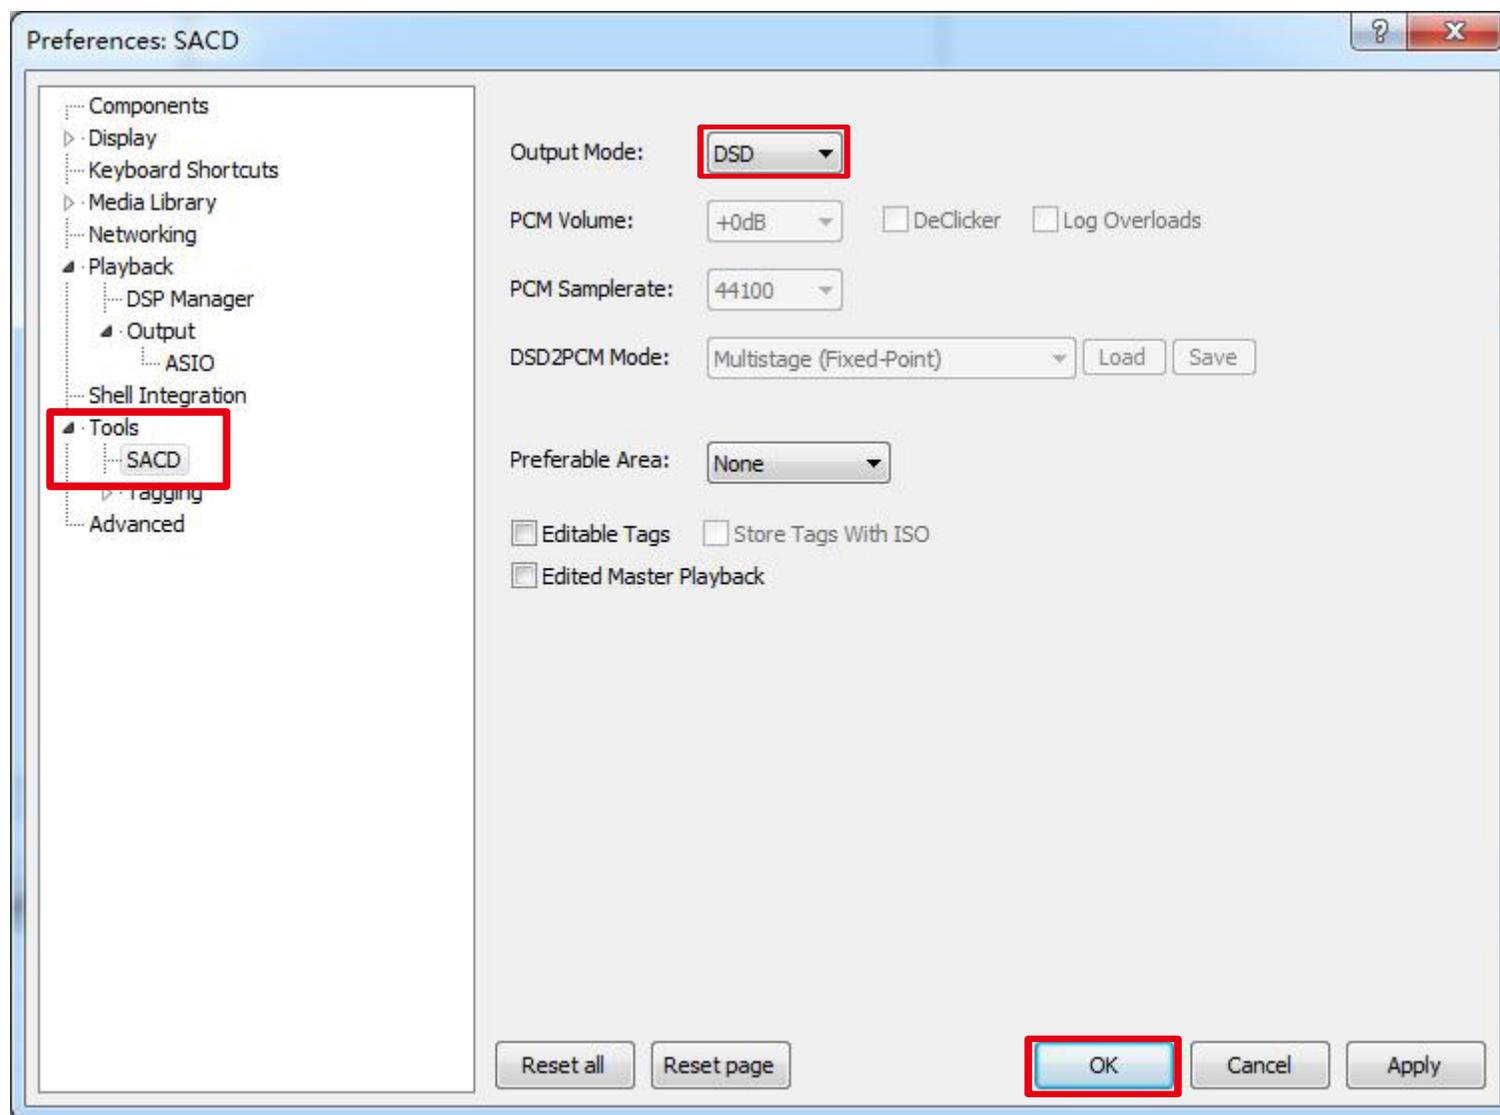

TOPPING™

The Settings of Foobar Player